

POLYETHYLENE BUOY

GBP-900



Diameter: 0.9m
Volume: 0.2m³
For proximity beaconing


- Single float in virgin polyethylene, UV stabilised and precompounded to reduce colour ageing, with standard wall thickness 7mm
- Polyethylene spar
- Equipped with St. Andrew cross (aluminium wings) fitted on the spar for Special Mark
- Expanded polystyrene (EPS) foaming available upon request

0.9M DIAMETER FLOAT

0.2m³ volume

ADDITIONAL CHARACTERISTICS

Reserve buoyancy (m³)	Total weight (kg)
0.18	19
Focal plane (m)	Visibility (m²)
up to 1.3	0.4
Draught (m)	Recommended mooring chain
0.3	Ø 14mm
Overall height (m)	Recommended lantern
1.6	Self-contained LED lanterns up to 3NM

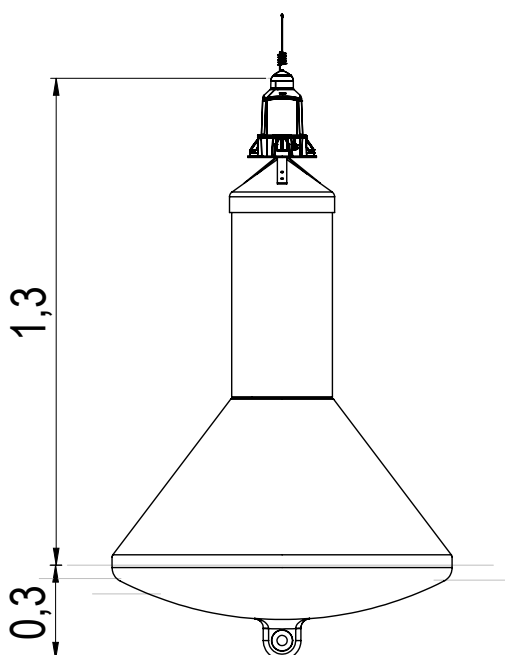

Specifications subject to change or variation without notice - 2018